

SUNCENT

Suncen Technology Co., Ltd.



X6

Ultrasonic Flowmeter

Product Brochure



ULTRASONIC FLOWMETER X6

Widely used in chemicals, irrigation, industrial consumption, gas, water supply, water treatment, boiler, cleaning machine, HVAC systems....



X6 is an international high-end transit-time ultrasonic

- Fully field configurable
- Highest performance, extended functionality and effectiveness for large pipe diameter (up to DN2000)
- High zero stability, nearly drift free
- Improved very user-friendly menu
- Daily, monthly and yearly totalized flow rate
- Positive, negative and net flow totalizers (with user-selectable scale factors)
- Configurable pulse, analog and frequency outputs
- Digital communications: RS485, Modbus, BACnet (optional)

SPECIFICATIONS

Performance specifications

Flow range	0~± 12 m/s (0~±40 ft/s)
Accuracy	± 1.0%
Repeatability	0.2%
Linearity	±1.0%
Pipe size	25mm to 2000mm (1" to 80")


Function specifications

Outputs	Analog output: 4~20mA (max load 750) Pulse output: 0~9999Hz, OCT, (min. and max. frequency is adjustable) Relay output: SPST, max 1Hz, (1A@125VAC or 2A@30VDC)
Communication	Rs485, Modbus, BACnet (optional)
Power supply	24V to 36V DC
Keypad	4 key with tactile action
Display	2.2" TFT LCD 320x240
Temperature	Transmitter: -40°C ~ 60°C (-40° F ~ 140° F) Standard Transducer: -40°C ~ 80°C (-40° F ~ 176° F)
Humidity	UP to 95% RH, non-condensing


Physical specifications

Transmitter	Die-cast aluminum
Transducer	Encapsulated design, double-shielded transducer cable. Standard cable length: 10m (33ft)
Weight	Transmitter: approximately 0.5kg (1.1 lb) Standard transducer: approximately 1.0kg (2.2 lb)

WIRING DIAGRAM

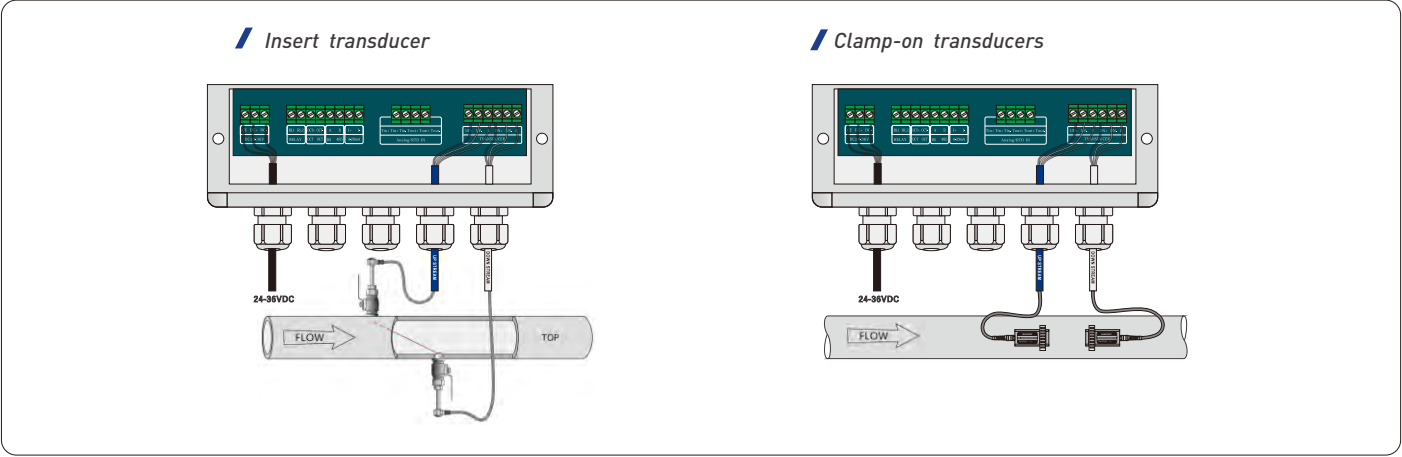

DIMENSIONS

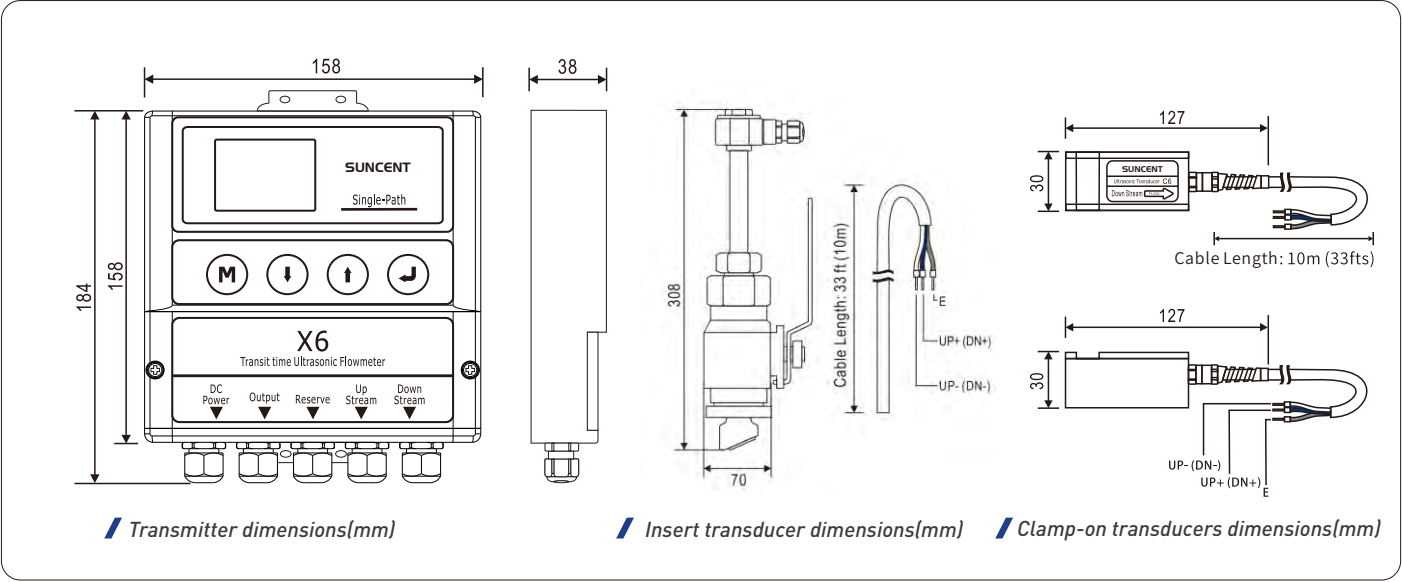

ORDERING INFORMATION

Code	Input and output
1	4-20mA, OCT pulse output, relay output, RS-485
Code	Transmitter enclosure area classification
1	IP54, PC plastic machined enclosure
2	Customer specific requirements
Code	Type of transducers
W6	Insert transducer. Operating temperature: -40°C ~+80°C (-40°F~176°F)
C6	Clamp-on transducers. Operating temperature: -40°C ~+80°C (-40°F~176°F)
Code	Transducer cable length
033	Cable length 10m (33 ft)
XXX	Extended length, up to 200m (660 ft), per 5m (16 ft) is a lengthen unit

PRODUCT LINES



·Dedicated Ultrasonic Flowmeter X8

Flow range	Accuracy	Pipe size
0-±12 m/s	±0.5%	25mm - 5000mm



·Portable Ultrasonic Flowmeter P8

Flow range	Accuracy	Pipe size
0-±12 m/s	±0.5%	25mm - 5000mm



·Multi-Path Ultrasonic Flowmeter D8

Flow range	Accuracy	Pipe size
0-±12 m/s	±0.5%	200mm - 5000mm



·Multi-Path Ultrasonic Energy Meter ED8

Flow range	Accuracy	Pipe size
0-±12 m/s	±0.5%	200mm - 5000mm



·Dedicated Ultrasonic Flowmeter X6

Flow range	Accuracy	Pipe size
0-±12 m/s	±1.0%	25mm - 2000mm



·Ultrasonic Energy Meter EX8

Flow range	Accuracy	Pipe size
0-±12 m/s	±0.5%	25mm - 5000mm



·Fixed Buckled Ultrasonic Energy Meter EX3

Flow range	Accuracy	Pipe size
0.1-5 m/s	±1.0%	DN15 - DN80



·Fixed Segmented Ultrasonic Flowmeter X2

Flow range	Accuracy	Pipe size
0.1-5m/s	±1.0%	¢20 - ¢63



·Fixed Buckled Ultrasonic Flowmeter X3

Flow range	Accuracy	Pipe size
0.1-5 m/s	±1.0%	¢6.35 - ¢90

Suncent Technology Co., Ltd.

Add: 5F, Bldg NO7, Gold-Star Factory Zone,
Dalang St, Longhua District, Shenzhen, China
Tel: +86 755-2100-8991, +86 173-0202-8585
Fax: +86 755-2100-8992
E-mail: intl@suncent.tech